





Koala Kidsitter® Strap Replacement Instructions


Materials Supplied: Three #8-32 3/8" Phillips Pan Head Machine Screws Tools Required: Phillips Head Screwdriver

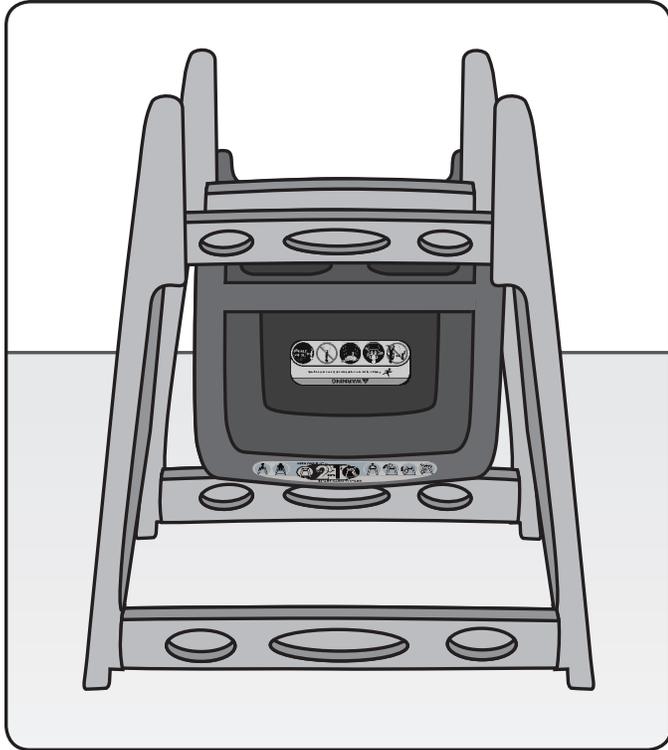


1. Position the KidSitter® so that it is in the infant car seat carrier position. Release the strap from the buckle on the outside of the high chair leg.

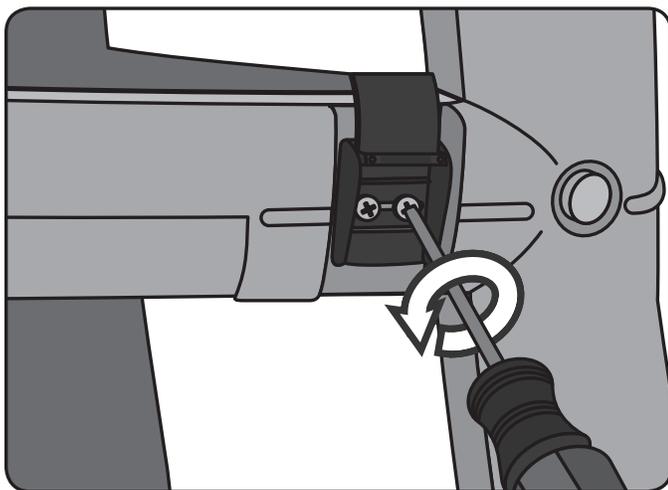

2. Locate the plastic clip on the left leg and open it so that the two screws securing it to the leg are exposed. Using a Phillips Head Screwdriver remove the two screws. Discard the old clip and screws.

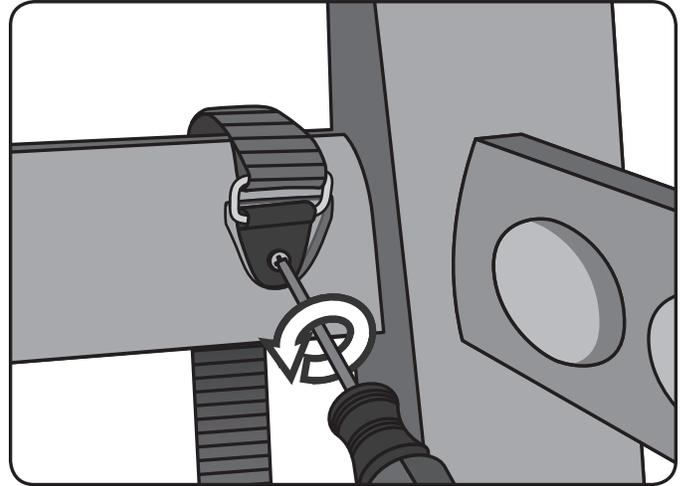

3. On the right leg, loosen the screw securing the strap to the chair. Discard the old strap and screw.

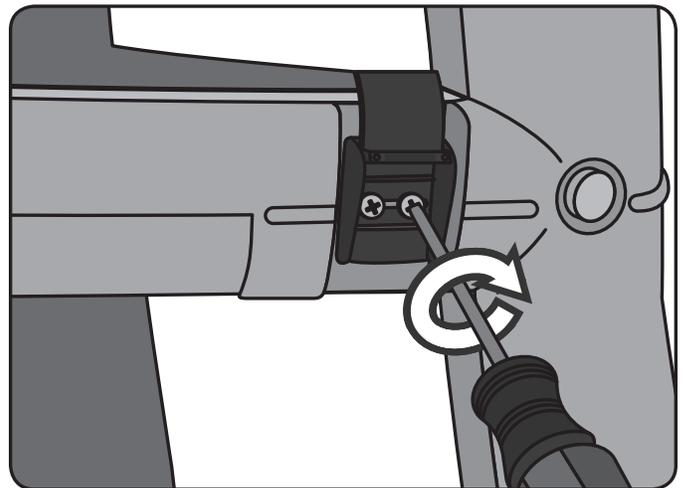


4. Take the new clip and position it on the left leg so that slot in the clip aligns with the two holes on the left leg. The plastic lever should be at the top of the clip. Using a Phillips Head Screwdriver, secure the clip to the leg with two of the screws provided.


Instructions Continued on the Back





Koala Kidsitter® Strap Replacement Instructions

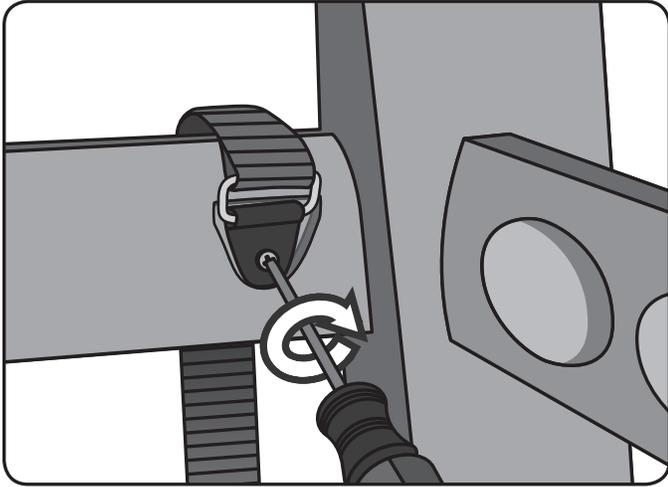

5. Take the new strap and position it on the right leg so that the hole in the chafe tab aligns with the hole in the right leg. Use a Phillips Head Screwdriver to secure the strap to the leg, using the screw provided.

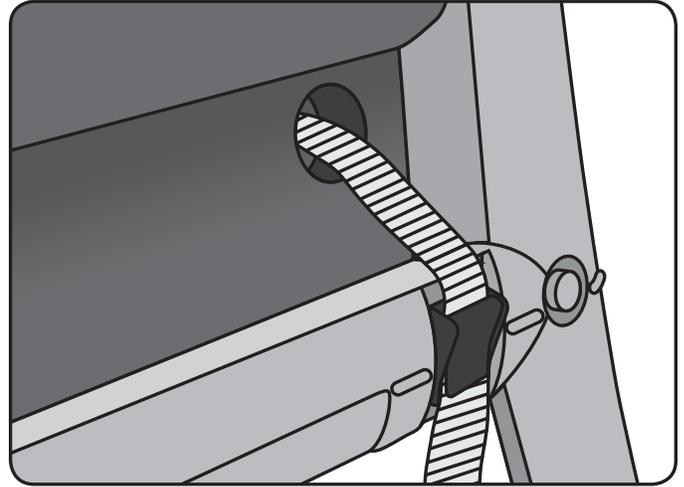

6. Position the KidSitter® so that it is in the High Chair position. Thread the strap through the hole on the right side of the seat, across the seat surface and through the hole on the left side of the seat. Thread the strap into the clip and push down on the clip to secure the strap.

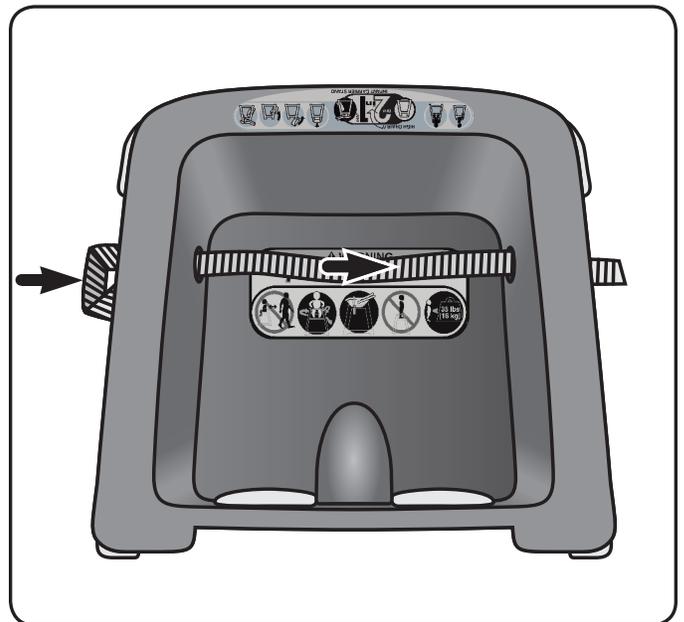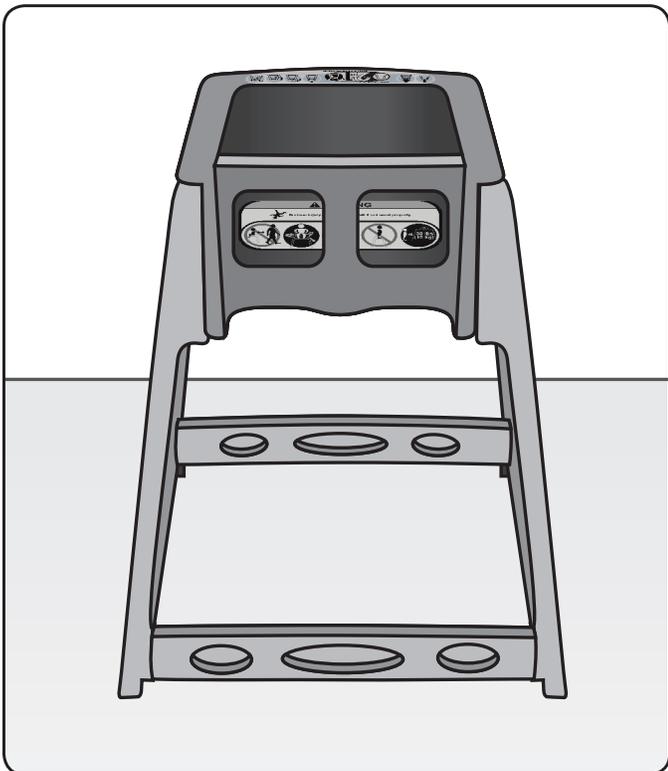

7. Clean the KidSitter® and return it to use.

Koala Kare Products A Division of Bobrick
6982 South Quentin St., Centennial, CO 80112-3945

Main 303.539.8300 **Toll Free** 888.733.3456
Fax 303.539.8399 **Koalabear.com**