




KB208 Replacement Shock Instructions

P/N 873-KIT

Tools Needed



Flat Head
Screwdriver



7/16" Wrench or
Socket Wrench

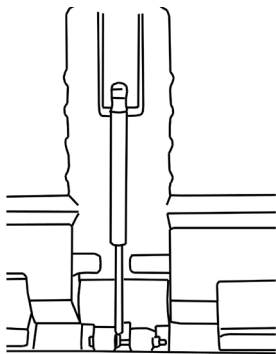


Fig. 1

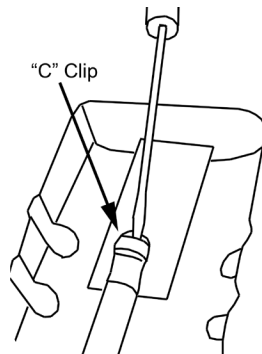


Fig. 2

Step 1:

- Remove the baby changing station from the wall. Turn the unit over so that you can access the shock on the rear of the station. At the top of the gas shock there is a "C" clip that holds the shock onto the ball stud. To remove the gas shock carefully slide a flat head screwdriver in-between the shock and the "C" clip. Once the tension on the "C" clip is removed you will be able to pull the gas shock off the ball stud. **Fig. 1, 2.**

Step 2:

- The lower part of the shock is attached to the unit by a 3/2" bolt. The head of the bolt and nut require 7/16" wrench or socket wrench to remove them. Once the nut is removed from the bolt you will be able to remove it from the lower tab on the shock. The hole on the tab is designed to be a snug fit so it may require some force to slide it off. **Fig. 3, 4.**




Fig. 3

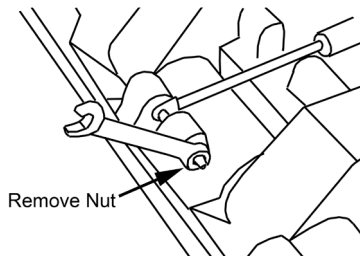


Fig. 4

Step 3:

- Take the new shock and insert the bolt through the tab. Secure the bolt using the nut and washer. Ensure that everything is in the same locations as they were before you removed the old shock.

Step 4:

- With the unit on the ground, compress the shock until you can align the head of the shock with the ball stud and push the head of the shock onto the ball stud. Make sure the head is secure by twisting it from side to side..

Step 5:

- Open and close door of unit several times to make sure that the shock is functioning properly. Remount unit following the proper installation instructions that were provided with the unit.

Koala Kare Products
A Division of Bobrick

6982 South Quentin Street, Centennial, CO 80112-3945

Main: 303.539.8300 | **Toll Free:** 888.733.3456 | **Fax:** 303.539.8399

Website: koalabear.com | **Email:** customerservice@koalabear.com