



KB100 & KB101 Replacement Shock Instructions

P/N 874-KIT (KB100)

P/N 877-KIT (KB101)




Materials Included:

Shock (1pc)

Tools Required:

Phillips and Flat Head Screwdrivers

1. Remove the Baby Changing Station from the wall.
2. Turn the unit over so that you can access the shock on the back side of the station. On both ends of the shock there is a "C" clip that holds the shock onto the ball stud. To remove the shock, carefully slide a flat head screwdriver in-between the shock and the "C" clip. Once the tension on the "C" clip is removed you will be able to pull the shock off the ball stud. Repeat on both ends of the shock. Remove the shock completely from the unit.
3. Open the door of the Baby Changing Station all of the way. You will be able to locate the lower ball stud on the bottom of the door. Slide the thin end of the replacement shock down through the hole in the back of the unit.
4. Snap the replacement shock onto the lower ball stud. Make sure the shock is secured to the ball stud by slightly twisting the shock to make sure that it does not come unhooked.
5. Close the door of the Baby Changing Station all of the way. With the door completely closed compress the shock by pressing downward so that it can be attached to the upper ball stud. Snap the shock onto the ball stud. Twist the shock to make sure that it does not come unattached from the ball stud.
6. Open and close door of unit several times to make sure that the shock is functioning properly. Remount unit following the proper installation instructions that were provided with the unit. Once the unit is properly installed, check the shock several times by opening and closing the Baby Changing Station.

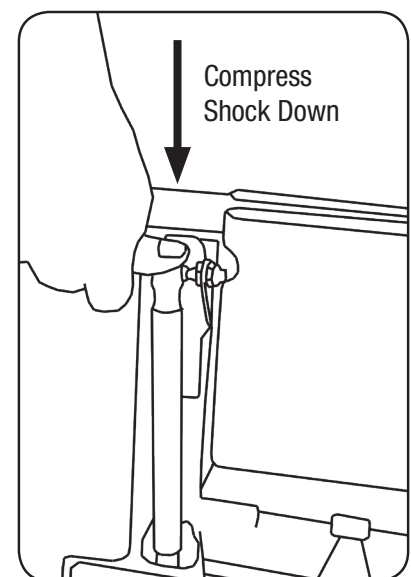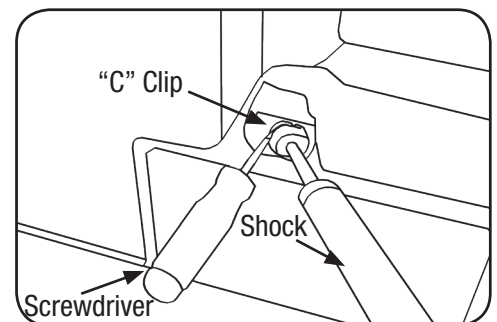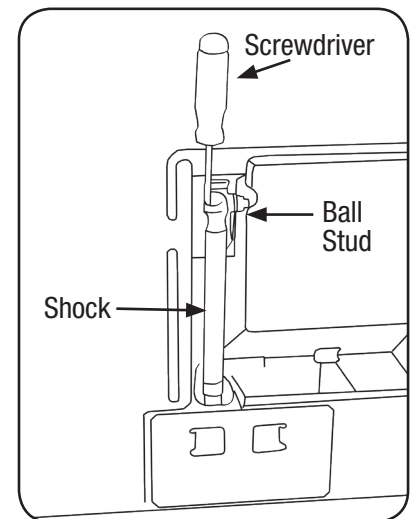

Koala Kare Products A Division of Bobrick
6982 South Quentin St., Centennial, CO 80112-3945

Main 303.539.8300 **Toll Free** 888.733.3456
Fax 303.539.8399 **Koalabear.com**

P/N 306 - August 2017